

### TouchIT 42" LCD


Panel	AU Full HD WUXGA TFT LCD
Aspect Ratio	16:9
Resolution ( maximum)	1920 x 1080
Max Brightness	1000cc/m <sup>2</sup> ( typical)
Dot pitch ( mm )	0.681H x 0.681W mm
Display Color	Full color 262K ( typical ) / 16.7M ( supported )
( H/V ) View Angel	176 Degree
Input Signal	15 Pin D - Sub, AV, S terminals, component video, HDMI, USB,
V/H Frequency	50-75 Hz / 31-64 KHz
Reponse Time tr/tf	8 ms
Display Area	891.68 ( H ) x 523.10 ( V ) mm
Max Contrast ratio	1000:1 ( typical )
Compatible digital signal	480p, 525i, 525p, 720p, 1080i, 1080p
Weight (kg)	Net : 27.7 kg ; Gross : 34 kg
Audio Output	Separation of high and low 4 speakers 10 W Surround Sound * 2
Dimensions (mm)	891.68 ( H ) X 523.1 ( V ) ( with Stands plus 90 ) mm
Max Power Consumption	INPUT 100 ~ 240 V AC 50/60HZ 6 A ( Temperature ) -20 / -50 ( Humidity ) 5% / 95%
Operation Environment	Standby 2W, Working 220 - 250W
Power Consumption	400mm x 200mm
VESA Mounting Configuration	4mm Tempered
Glass Finish	Infrared rays
Detection Form	4096 x 4096
Resolution (Non-physical)	USB 2.0
Interface Type	not affected by sunlight
Working Environment	45-70Hz
Scan Periods	Operating -30 to 80C (temperature slope less that 25C/Hr)
Temperature Range	Storage -30 to 85C (temperature slope less that 25C/Hr)
Humidity	Operating 0-85%, non condensing
	Storage 0-95%, non condensing
ESD Capacity	Contact voltage discharge is 4KV
	Air discharge is 8KV
Speed	First point 25ms consecutive points 8ms
Connector Type	USB 2.0
IR Touch Power Supply	From USB
USB Cable Length	450mm – 500mm
Package Includes	1 x LCD
	1 x Power Cable
	1 x VGA Cable
	1 x Remote Control
	2 x AAA Batteries
	1 x Table Top Stand
	1 x USB Cable
	1 x Wizteach CD (1 user)
	Quick Start Guide
	1 x Stylus
Warranty	2 Years RTB

### TouchIT 55" LCD

Panel	AU Full HD WUXGA LVDS interface
Aspect Ratio	16:10
Resolution ( maximum)	1920 x 1080
Max Brightness	1000cc/m <sup>2</sup> ( typical)
Dot pitch ( mm )	0.630H mm x 0.630W mm x RGB
Display Color	Full color 262K ( typical ) / 16.7M ( supported )
( H/V ) View Angel	176 Degree
Input Signal	15 Pin D - Sub, AV, S terminals, component video, HDMI, USB,
V/H Frequency	50-75 Hz / 31-64 KHz
Reponse Time tr/tf	8 ms
Display Area	1286.0 ( H ) x 745.0 ( V ) ( Typ.)
Max Contrast ratio	1000:1 ( typical )
Compatible digital signal	480p, 525i, 525p, 720p, 1080i, 1080p
Weight (kg)	Net : 31 kg ; Gross : 40 kg
Audio Output	Separation of high and low 4 speakers 20 W Surround Sound * 2
Dimensions (mm)	1286.0 H x 745.0 V (Typ.) ( with Stands plus 90 ) mm
Max Power Consumption	INPUT 100 ~ 240 V AC 50/60HZ 6 A ( Temperature ) -20 / -50 ( Humidity ) 5% / 95%
Operation Environment	Standby 4W, Working 230 - 260W
Power Consumption	600mm x 400mm
VESA Mounting Configuration	4mm Tempered
Glass Finish	Infrared rays
Detection Form	4096 x 4096
Resolution (Non-physical)	USB 2.0
Interface Type	not affected by sunlight
Working Environment	45-70Hz
Scan Periods	Operating -30 to 80C (temperature slope less that 25C/Hr)
Temperature Range	Storage -30 to 85C (temperature slope less that 25C/Hr)
Humidity	Operating 0-85%, non condensing
	Storage 0-95%, non condensing
ESD Capacity	Contact voltage discharge is 4KV
	Air discharge is 8KV
Speed	First point 25ms consecutive points 8ms
Connector Type	USB 2.0
IR Touch Power Supply	From USB
USB Cable Length	450mm – 500mm
Package Includes	1 x LCD
	1 x Power Cable
	1 x VGA Cable
	1 x Remote Control
	2 x AAA Batteries
	1 x Table Top Stand
	1 x USB Cable
	1 x Wizteach CD (1 user)
	Quick Start Guide
	1 x Stylus
Warranty	2 Years RTB

### TouchIT 65" LCD

Panel	AU Full HD WUXGA LVDS interface
Aspect Ratio	16:10
Resolution ( maximum)	1920 x 1080
Max Brightness	1600cc/m <sup>2</sup> ( typical)
Dot pitch ( mm )	0.7440H mm x 0.7440W mm x RGB
Display Color	1073.7M ( 8-bit+FRG )
( H/V ) View Angel	178 Degree
Input Signal	15 Pin D - Sub, AV, S terminals, component video, HDMI, USB,
V/H Frequency	50-75 Hz / 31-64 KHz
Reponse Time tr/tf	8 ms
Display Area	1428.48 ( H ) x 803.52 ( V ) mm
Max Contrast ratio	1500:1 ( typical )
Compatible digital signal	480p, 525i, 525p, 720p, 1080i, 1080p
Weight (kg)	Net : 43 kg ; Gross : 55 kg
Audio Output	Separation of high and low 4 speakers 15 W Surround Sound * 2
Dimensions (mm)	L 1553 * D55 ( with rear projection plus 80 ) * H960 ( with Stands plus 90 ) mm
Max Power Consumption	INPUT 100 ~ 240 V AC 50/60HZ 6 A ( Temperature ) -20 / -50 ( Humidity ) 5% / 95%
Operation Environment	( Standby ) 5W, ( Working ) 300 - 360W
Power Consumption	600mm x 200mm
VESA Mounting Configuration	4mm Tempered
Glass Finish	Infrared rays
Detection Form	4096 x 4096
Resolution (Non-physical)	USB 2.0
Interface Type	not affected by sunlight
Working Environment	45-70Hz
Scan Periods	Operating -30 to 80C (temperature slope less that 25C/Hr)
Temperature Range	Storage -30 to 85C (temperature slope less that 25C/Hr)
Humidity	Operating 0-85%, non condensing
	Storage 0-95%, non condensing
ESD Capacity	Contact voltage discharge is 4KV
	Air discharge is 8KV
Speed	First point 25ms consecutive points 8ms
Connector Type	USB 2.0
IR Touch Power Supply	From USB
USB Cable Length	450mm – 500mm
Package Includes	1 x LCD
	1 x Power Cable
	1 x VGA Cable
	1 x Remote Control
	2 x AAA Batteries
	1 x Table Top Stand
	1 x USB Cable
	1 x Wizteach CD (1 user)
	Quick Start Guide
	1 x Stylus
Warranty	2 Years RTB

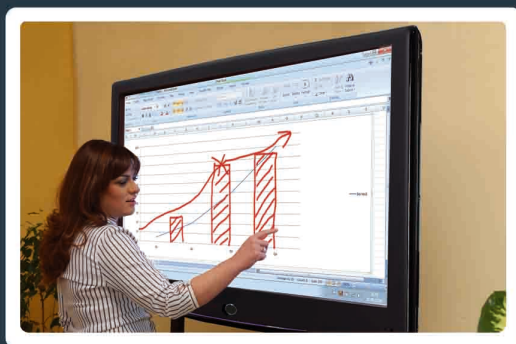

## Part Numbers

0609465686363	42" Interactive LCD
0609465686370	55" Interactive LCD
0609465686387	65" Interactive LCD
609465686356	TouchIT LCD Stand (Manual)